


**METAOR - VERTICAL
Aluminium Radiator**

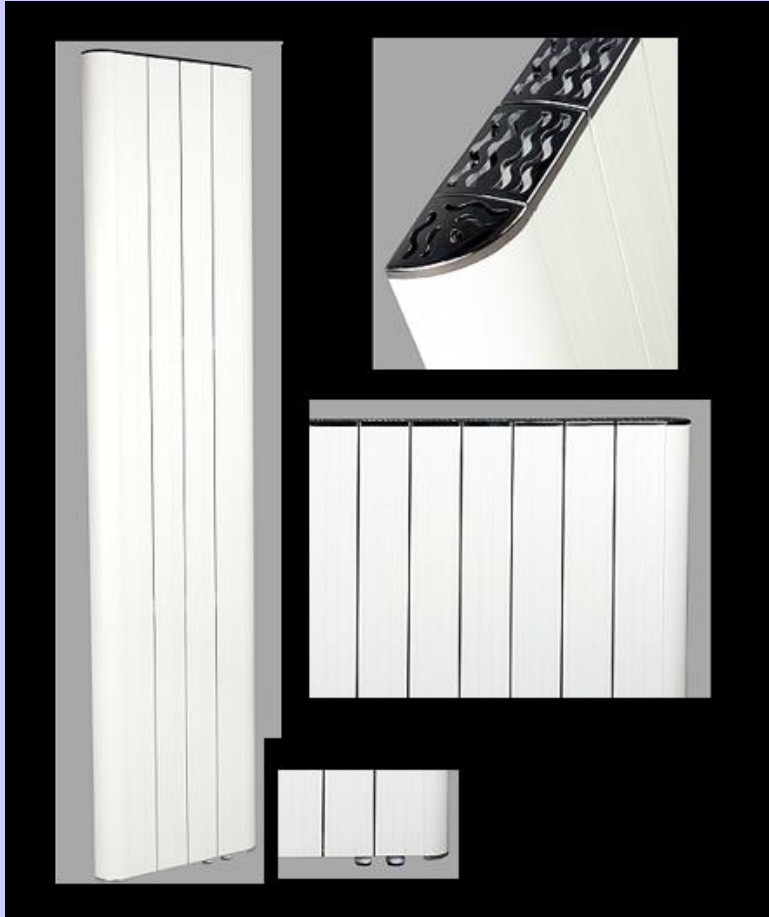

PRODUCT MODEL

Overall Dimension				Tube	Heat Outputs	
Height	Length			Quantity	Delta T : 60C	
mm	mm				watts	Btu
1500	335			3	1.058	3.596
1500	415			4	1.410	4.794
1500	495			5	1.763	5.993
1500	575			6	2.115	7.191
1800	335			3	1.269	4.315
1800	415			4	1.692	5.753
1800	495			5	2.115	7.191
1800	575			6	2.538	8.629

Pipe Connection: 50mm (Underside of the Radiator)

Euronorm: BS EN442

NOTE: Flow Valve to be installed where the red cap is removed. Return Valve where the blue cap is removed.

METAOR - HORIZONTAL Aluminium Radiator



PRODUCT MODEL


Overall Dimension				Tube	Heat Outputs	
Height	Length			Quantity	Delta T : 60C	
mm	mm				watts	Btu
500	575			6	705	2.397
500	735			8	940	3.196
500	895			10	1.175	3.995
500	1055			12	1.410	4.794
500	1215			14	1.645	5.593
600	575			6	846	2.876
600	735			8	1.128	3.835
600	895			10	1.410	4.794
600	1055			12	1.692	5.753
600	1215			14	1.974	6.712

Pipe Connection: 50mm (Underside of the Radiator)

Euronorm: BS EN442

NOTE: Flow Valve to be installed where the red cap is removed. Return Valve where the blue cap is removed.

**CORWEN DOUBLE - VERTICAL
Aluminium Radiator**

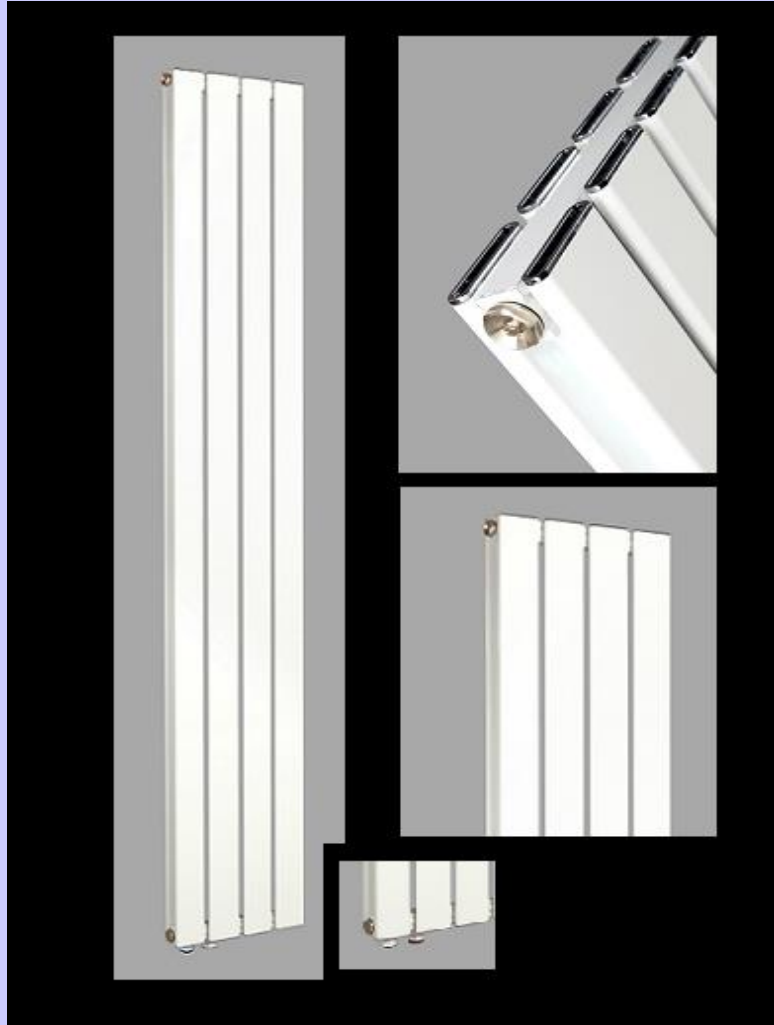

PRODUCT MODEL

Overall Dimension				Tube	Heat Outputs	
Height	Length			Quantity	Delta T : 60C	
mm	mm				watts	Btu
1500	270			4	1.230	4.182
1500	340			5	1.538	5.228
1500	410			6	1.845	6.273
1500	550			8	2.460	8.364
1800	270			4	1.476	5.018
1800	340			5	1.845	6.273
1800	410			6	2.214	7.528
1800	550			8	2.952	10.037

Pipe Connection: 50mm (Underside of the Radiator)

Euronorm: BS EN442

NOTE: Flow Valve to be installed where the red cap is removed. Return Valve where the blue cap is removed.

**CORWEN DOUBLE - HORIZONTAL
Aluminium Radiator**



PRODUCT MODEL

Overall Dimension				Tube	Heat Outputs	
Height	Length			Quantity	Delta T : 60C	
mm	mm				watts	Btu
500	480			7	718	2.440
500	620			9	923	3.137
500	760			11	1.128	3.834
500	1040			15	1.538	5.228
500	1250			18	1.845	6.273
600	480			7	861	2.927
600	620			9	1.107	3.764
600	760			11	1.353	4.600
600	1040			15	1.845	6.273
600	1250			18	2.214	7.528

Pipe Connection: 50mm (Underside of the Radiator)

Euronorm: BS EN442

NOTE: Flow Valve to be installed where the red cap is removed. Return Valve where the blue cap is removed.